



**Kobe Fabrics B.V.**  
**La Défense 11**  
**5026 SC TILBURG**  
**Netherlands**

**Your notice of**  
 04-07-2025

**Your reference**

**Date**  
 18-08-2025

## Analysis Report 25.03707.01

Required tests :

**EN 13773 (2003)**

| Sample id | Information given by the client | Date of receipt |
|-----------|---------------------------------|-----------------|
| T2513675  | DUSK FR 300 cm                  | 04-07-2025      |




Gina Créelle  
 Order responsible

This report may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.  
 The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.  
 In assessing compliance with the specifications, we did not take into account the uncertainty on the test results.



## Samples

T2513675  
DUSK FR 300 cm

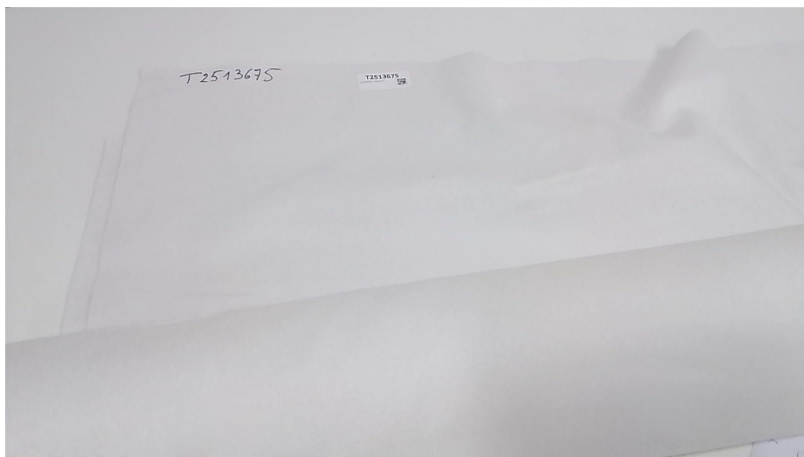



**Reference: T2513675 - DUSK FR 300 cm**

**Washing and drying**

|                                |                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------|
| Date of ending the test        | 14-07-2025                                                                                          |
| Standard used                  | ISO 6330 (2000) + A1 (2008), ISO 6330 (2012)                                                        |
| Deviation from the standard    | -                                                                                                   |
| Conditioning                   | 20°C, relative humidity 65%                                                                         |
| Apparatus                      | Wascator FOM 71 (type A)                                                                            |
| Used detergent                 | ECE detergent (Type 3)                                                                              |
| Washing method and temperature | 8A- 30°C (2000)                                                                                     |
| Drying method                  | A = Line dry (2000)                                                                                 |
| Number of washing cycles       | 1                                                                                                   |
| Mass of the test specimens     | 641g                                                                                                |
| Mass of the ballast            | The washing machine is filled with ballast to achieve 2 kg in total                                 |
| Remark                         | Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric. |

Sample generated: T2513675\_01d



**Reference: T2513675\_01d - DUSK FR 300 cm**

**Textiles – Burning behaviour – Curtains and drapes - Textile fabrics - Determination of the ignitability of vertically oriented specimens.**

Date of ending the test 24-07-2025  
Standard used EN 1101 (1995) + A1 (2005)  
Product standard EN 13773 (2003)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%  
Testing atmosphere 24°C, relative humidity 60%

Dimension of the specimens 200 mm x 80 mm

Ignition Bottom edge

The test specimens have been cleaned.

**Length**

| Flame application time (s) | Cases of ignition | Cases of non-ignition |
|----------------------------|-------------------|-----------------------|
| 1                          | 0                 | 1                     |
| 2                          | 0                 | 1                     |
| 3                          | 0                 | 1                     |
| 4                          | 0                 | 1                     |
| 5                          | 0                 | 1                     |
| 10                         | 0                 | 1                     |
| 15                         | 0                 | 1                     |
| 20                         | 0                 | 5                     |

The mean of the recorded times at which ignition was observed is calculated  
No ignition within 20 s



### Width

| Flame application time (s) | Cases of ignition | Cases of non-ignition |
|----------------------------|-------------------|-----------------------|
| 1                          | 0                 | 1                     |
| 2                          | 0                 | 1                     |
| 3                          | 0                 | 1                     |
| 4                          | 0                 | 1                     |
| 5                          | 0                 | 1                     |
| 10                         | 0                 | 1                     |
| 15                         | 0                 | 1                     |
| 20                         | 0                 | 5                     |

The mean of the recorded times at which ignition was observed is calculated  
 No ignition within 20 s

Minimum ignition time

No ignition within 20 s

**Reference: T2513675 - DUSK FR 300 cm**

**Textiles and textile products – Burning behaviour – Curtains and drapes. Measurement of flame spread of vertically oriented specimens with large ignition source.**

Date of ending the test 18-08-2025  
Standard used EN 13772 (2011)  
Product standard EN 13773 (2003)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%


The test specimens have not been cleaned nor submitted to an accelerated ageing procedure.

**Length**

|                                          | Front | Back | Front | Front |
|------------------------------------------|-------|------|-------|-------|
| Severance 1 <sup>st</sup> thread         | no    | no   | no    | no    |
| Severance 2 <sup>nd</sup> thread         | no    | no   | no    | no    |
| Severance 3 <sup>rd</sup> thread         | no    | no   | no    | no    |
| Time to sever 3 <sup>rd</sup> thread (s) | /     | /    | /     | /     |
| Destroyed length (mm)                    | 145   | 140  | 140   | 145   |
| Flaming debris                           | no    | no   | no    | no    |

**Width**

|                                          | Front | Back | Back | Back |
|------------------------------------------|-------|------|------|------|
| Severance 1 <sup>st</sup> thread         | no    | no   | no   | no   |
| Severance 2 <sup>nd</sup> thread         | no    | no   | no   | no   |
| Severance 3 <sup>rd</sup> thread         | no    | no   | no   | no   |
| Time to sever 3 <sup>rd</sup> thread (s) | /     | /    | /    | /    |
| Destroyed length (mm)                    | 140   | 145  | 140  | 140  |
| Flaming debris                           | no    | no   | no   | no   |



**Reference: T2513675 - DUSK FR 300 cm**

**Washing and drying**

|                                |                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------|
| Date of ending the test        | 14-07-2025                                                                                          |
| Standard used                  | ISO 6330 (2000) + A1 (2008), ISO 6330 (2012)                                                        |
| Deviation from the standard    | -                                                                                                   |
| Conditioning                   | 20°C, relative humidity 65%                                                                         |
| Apparatus                      | Wascator FOM 71 (type A)                                                                            |
| Used detergent                 | ECE detergent (Type 3)                                                                              |
| Washing method and temperature | 8A- 30°C (2000)                                                                                     |
| Drying method                  | A = Line dry (2000)                                                                                 |
| Number of washing cycles       | 12                                                                                                  |
| Mass of the test specimens     | 1019g                                                                                               |
| Mass of the ballast            | The washing machine is filled with ballast to achieve 2 kg in total                                 |
| Remark                         | Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric. |

Sample generated: T2513675\_02d



**Reference: T2513675\_02d - DUSK FR 300 cm**

**Textiles and textile products – Burning behaviour – Curtains and drapes. Measurement of flame spread of vertically oriented specimens with large ignition source.**

Date of ending the test 18-08-2025  
Standard used EN 13772 (2011)  
Product standard EN 13773 (2003)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%

The test specimens have been cleaned.

**Length**

|                                          | Front | Back | Front | Front |
|------------------------------------------|-------|------|-------|-------|
| Severance 1 <sup>st</sup> thread         | no    | no   | no    | no    |
| Severance 2 <sup>nd</sup> thread         | no    | no   | no    | no    |
| Severance 3 <sup>rd</sup> thread         | no    | no   | no    | no    |
| Time to sever 3 <sup>rd</sup> thread (s) | /     | /    | /     | /     |
| Destroyed length (mm)                    | 150   | 145  | 145   | 145   |
| Flaming debris                           | no    | no   | no    | no    |

**Width**

|                                          | Front | Back | Front | Front |
|------------------------------------------|-------|------|-------|-------|
| Severance 1 <sup>st</sup> thread         | no    | no   | no    | no    |
| Severance 2 <sup>nd</sup> thread         | no    | no   | no    | no    |
| Severance 3 <sup>rd</sup> thread         | no    | no   | no    | no    |
| Time to sever 3 <sup>rd</sup> thread (s) | /     | /    | /     | /     |
| Destroyed length (mm)                    | 145   | 145  | 145   | 145   |
| Flaming debris                           | no    | no   | no    | no    |



**Reference: T2513675 - DUSK FR 300 cm**

**Classification of curtains and drapes according to EN 13773**

Product standard EN 13773 (2003)

Classification in accordance with EN 13773 Class 1