

Document number: 202201416

Report date: 1/07/2022

Fabric reference: Tone FR

Date analyses: 1/07/2022

Customer: Kobe Interior Fabrics

Place analyses: Labotex

Date of request: 18/05/2022

Samples received: 23/05/2022

Testing and conditioning in standard atmosphere, T (20±2)°C and RH (65±4)%

## Specification

## Results

## Remarks

### Burning behaviour of fabrics for curtains drapes

### EN 1101


Test EN1101 is performed after subjecting the fabric to 1 washing cycle, based on the recommended washing instructions.

EN13773

conditioning min 24h in standard atmosphere

used gas: propane  
flame height: 40mm  
bottom edge ignition:  
size EN1101: 200x80mm  
size EN13772: 560x170mm

### flowchart EN13773

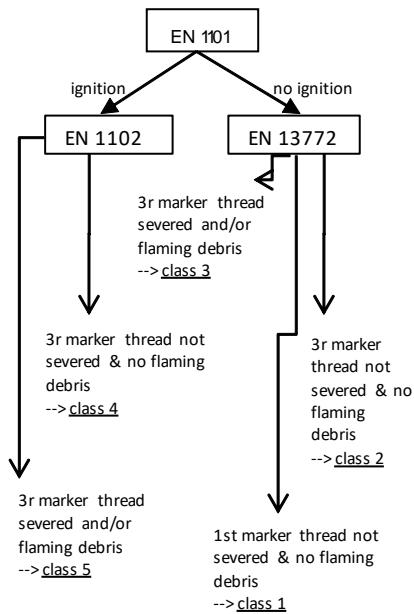

flame application time	warp	weft
1s	no ignition	no ignition
2s	no ignition	no ignition
3s	no ignition	no ignition
4s	no ignition	no ignition
5s	no ignition	no ignition
10s	no ignition	no ignition
15s	no ignition	no ignition
20s	no ignition	no ignition

Mean ignition time warp: 0.0

Mean ignition time weft: 0.0

Minimum ignition time: 0.0

Document number: 202201416

Report date: 1/07/2022

Fabric reference: Tone FR

Date analyses: 1/07/2022

Customer: Kobe Interior Fabrics

Place analyses: Labotex

Date of request: 18/05/2022

Samples received: 23/05/2022

Testing and conditioning in standard atmosphere, T (20±2)°C and RH (65±4)%

Specification	Results				Remarks	!
<b><u>EN13772 before washing</u></b>						
warp	face	reverse	reverse	reverse		
1st marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
2nd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
3rd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
time to severance 3rd marker thread (s)	<div>0</div>	<div>0</div>	<div>0</div>	<div>0</div>		
destroyed length (mm)	<div>139</div>	<div>127</div>	<div>148</div>	<div>150</div>		
flaming debris	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
weft	face	reverse	face	face		
1st marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
2nd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
3rd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
time to severance 3rd marker thread (s)	<div>0</div>	<div>0</div>	<div>0</div>	<div>0</div>		
destroyed length (mm)	<div>156</div>	<div>122</div>	<div>143</div>	<div>118</div>		
flaming debris	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
<b><u>EN13772 after washing</u></b>						
warp	face	reverse	reverse	reverse		
1st marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
2nd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
3rd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
time to severance 3rd marker thread (s)	<div>0</div>	<div>0</div>	<div>0</div>	<div>0</div>		
destroyed length (mm)	<div>132</div>	<div>137</div>	<div>135</div>	<div>107</div>		
flaming debris	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
weft	face	reverse	face	face		
1st marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
2nd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
3rd marker thread severed	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		
time to severance 3rd marker thread (s)	<div>0</div>	<div>0</div>	<div>0</div>	<div>0</div>		
destroyed length (mm)	<div>113</div>	<div>132</div>	<div>145</div>	<div>115</div>		
flaming debris	<div>no</div>	<div>no</div>	<div>no</div>	<div>no</div>		

Document number: 202201416

Report date: 1/07/2022

Fabric reference: Tone FR

Date analyses: 1/07/2022

Customer: Kobe Interior Fabrics

Place analyses: Labotex

Date of request: 18/05/2022

Samples received: 23/05/2022

Testing and conditioning in standard atmosphere, T (20±2)°C and RH (65±4)%

Specification	Results	Remarks	!
<b>Classification</b>			
Class 1	X		
Class 2			
Class 3			
Class 4 or 5			



Labotex certifies that the results mentioned in this report are obtained after testing in accordance with the procedure and equipment specified by the concerned standards, unless noted differently.



Annick Gijsemans - Laboratory Manager

Labotex has the competence to perform tests in accordance with the requirements of standard NBN EN ISO/IEC 17025. The scope of this accreditation can be consulted on the BELAC website [https://ng3.economie.fgov.be/NL/belac/labotesting/applic/accreditedc\\_nl.asp?certificatienummer=364-TEST](https://ng3.economie.fgov.be/NL/belac/labotesting/applic/accreditedc_nl.asp?certificatienummer=364-TEST)

Sampling is performed by the customer. Fabric analysed as received. The results in this report only relate to the tested items.

Samples will be returned to the customer together with the certificate, if possible. Samples will not be retained, unless specified by the customer. Retained samples will be kept for maximum one year unless a specific retention period is necessary.

This report cannot be copied unless in its complete form and with written approval of Labotex (Kontich).

Uncertainty of measurement on the test result is not taken into account when assessing compliance with the specifications. When results are compliant to the specification, the square next to the result is empty. When the result is not compliant to the specification, the square is filled with a flag "v".

The uncertainty and the description of the methods are available at the lab on request.